




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

|  |  |   |  |
|--|--|---|--|
| (51) International Patent Classification <sup>7</sup> :<br><b>F41A 21/06, 21/48, 19/65, F41G 3/04,<br/>F42B 14/00</b>  |  | <b>A1</b>   | (11) International Publication Number: <b>WO 00/62005</b><br>(43) International Publication Date: 19 October 2000 (19.10.00) |
| (21) International Application Number: PCT/AU00/00297<br>(22) International Filing Date: 7 April 2000 (07.04.00)<br>(30) Priority Data:<br>PP 9613                      7 April 1999 (07.04.99)      AU<br>PQ 3843                      3 November 1999 (03.11.99)      AU<br>(71) Applicant (for all designated States except US): METAL<br>STORM LIMITED [AU/AU]; Level 34, 345 Queen Street,<br>Brisbane, Queensland 4000 (AU).<br>(72) Inventor; and<br>(75) Inventor/Applicant (for US only): O'DWYER, James, Michael<br>[AU/AU]; 12 Peppertree Street, Sinnamon Park, Brisbane,<br>Queensland 4073 (AU).<br>(74) Agent: PIZZEYS PATENT & TRADE MARK ATTORNEYS;<br>Level 11, 167 Eagle Street, Brisbane, Queensland 4000<br>(AU). |  | (81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB,<br>BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM,<br>DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL,<br>IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU,<br>LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT,<br>RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ,<br>UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH,<br>GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian<br>patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European<br>patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR,<br>IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF,<br>CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).<br><br>Published<br>With international search report. |  |

(54) Title: PROJECTILE FIRING APPARATUS

## (57) Abstract

A weapon comprising a transportable pod having a plurality of barrel assemblies (10) of the type including a plurality of projectiles (11) arranged in-line within barrel (12). Each projectile (11) is associated with a discrete, selectively ignitable propellant charge (13) for propelling each projectile (11) sequentially through the muzzle of barrel (12). Each projectile (11) includes projectile body (22) in which matter or objects may be transported. Projectiles (11) are arranged with one another and barrel (12) so as to prevent rearward travel of an ignited propellant charge to the trailing propellant charge. The pod can include a direction control means for selectively varying the relative alignment between barrel assemblies (10) so as to selectively vary the relative delivered position of projectile (11) fired from different barrels (12). The weapon may be used for military or civilian applications.

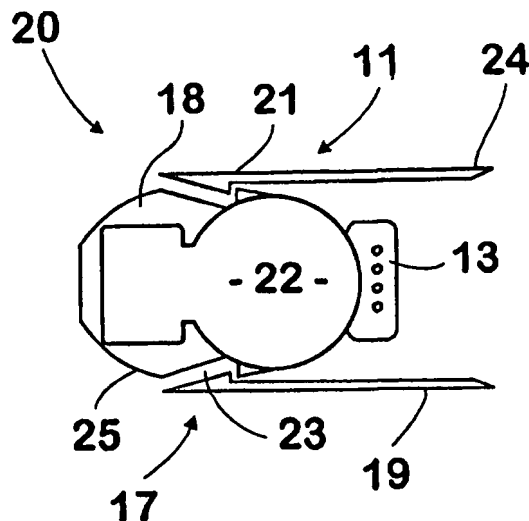

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

|    |                          |    |  |    |  |    |                          |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania                  | ES | Spain                                    | LS | Lesotho                                      | SI | Slovenia                 |
| AM | Armenia                  | FI | Finland                                  | LT | Lithuania                                    | SK | Slovakia                 |
| AT | Austria                  | FR | France                                   | LU | Luxembourg                                   | SN | Senegal                  |
| AU | Australia                | GA | Gabon                                    | LV | Latvia                                       | SZ | Swaziland                |
| AZ | Azerbaijan               | GB | United Kingdom                           | MC | Monaco                                       | TD | Chad                     |
| BA | Bosnia and Herzegovina   | GE | Georgia                                  | MD | Republic of Moldova                          | TG | Togo                     |
| BB | Barbados                 | GH | Ghana                                    | MG | Madagascar                                   | TJ | Tajikistan               |
| BE | Belgium                  | GN | Guinea                                   | MK | The former Yugoslav<br>Republic of Macedonia | TM | Turkmenistan             |
| BF | Burkina Faso             | GR | Greece                                   | ML | Mali   | TR | Turkey                   |
| BG | Bulgaria                 | HU | Hungary                                  | MN | Mongolia                                     | TT | Trinidad and Tobago      |
| BJ | Benin                    | IE | Ireland                                  | MR | Mauritania                                   | UA | Ukraine                  |
| BR | Brazil                   | IL | Israel                                   | MW | Malawi                                       | UG | Uganda                   |
| BY | Belarus                  | IS | Iceland                                  | MX | Mexico                                       | US | United States of America |
| CA | Canada                   | IT | Italy                                    | NE | Niger  | UZ | Uzbekistan               |
| CF | Central African Republic | JP | Japan                                    | NL | Netherlands                                  | VN | Viet Nam                 |
| CG | Congo                    | KE | Kenya                                    | NO | Norway                                       | YU | Yugoslavia               |
| CH | Switzerland              | KG | Kyrgyzstan                               | NZ | New Zealand                                  | ZW | Zimbabwe                 |
| CI | Côte d'Ivoire            | KP | Democratic People's<br>Republic of Korea | PL | Poland                                       |    |                          |
| CM | Cameroon                 | KR | Republic of Korea                        | PT | Portugal                                     |    |                          |
| CN | China                    | KZ | Kazakstan                                | RO | Romania                                      |    |                          |
| CU | Cuba                     | LC | Saint Lucia                              | RU | Russian Federation                           |    |                          |
| CZ | Czech Republic           | LI | Liechtenstein                            | SD | Sudan  |    |                          |
| DE | Germany                  | LK | Sri Lanka                                | SE | Sweden                                       |    |                          |
| DK | Denmark                  | LR | Liberia                                  | SG | Singapore                                    |    |                          |
| EE | Estonia                  |    |  |    |  |    |                          |

## PROJECTILE FIRING APPARATUS

### TECHNICAL FIELD

This invention relates to projectiles and firing apparatus therefore and it has particular application to methods of and apparatus for firing projectiles for military use, although this invention is also applicable to civilian uses such as described in our simultaneously filed International application.

### BACKGROUND ART

The military applications of firing projectiles are well known, such as firing grenades, firing radar deflecting chaff and missile decoy packages. In military applications such as firing grenades, each cartridge case carries a projectile assembly containing a single grenade. Accordingly the relatively slow rate of delivery of grenades provides a significant constraint on the applications or utility of the equipment.

This invention has particular application to projectiles which are fired from a barrel having a plurality of projectiles arranged in-line within the barrel and which are associated with discrete selectively ignitable propellant charges for propelling the projectiles sequentially through the muzzle of the barrel. Sealing engagement is provided between projectiles and barrel so as to prevent rearward travel of an ignited propellant charge to the trailing propellant charge. Such barrels will be referred to hereinafter as of the type described. Such arrangements are illustrated in our earlier International Patent Applications.

Barrels assemblies of the type described have the disadvantage that significant time may be required to position them for firing on a selected target. This set-up time may be unsuitable for applications where time is of the essence, such as for setting up defences.

### OBJECTS OF THIS INVENTION

This invention aims to provide improved means for debilitating an enemy and/or to alleviate one or more of the shortcomings associated with presently available methods of and apparatus for firing projectiles for military and/or civilian uses.

DISCLOSURE OF INVENTION

With the foregoing in view, this invention in one aspect resides broadly in a plurality of barrel assemblies of the type described arranged in a transportable pod whereby the barrels may be transported to and directed at a selected target.

5       The pod may be formed as a unitary housing or it may have side walls which can splay outwardly to accommodate the barrel assemblies contained therein when in a splayed attitude. The pod may include aiming means for selectively orienting the barrels within the pod whereby the barrels may be directed at a selected target, alternatively, the pod may include an adjustable support such as a turret mounting.

10       Then again the transportable pod may be carried in a vehicle which may be selectively oriented about any desired axis to direct the barrels at a selected target, such as an aircraft whereby fixed orientation of the pod and barrel assemblies is appropriate.

Such pods will require minimal set-up time for firing many projectiles at a  
15       selected target. This will be advantageous where time is of the essence, such as for establishing defences.

Suitably the barrel assemblies are of the low pressure type which fire grenade-  
like projectiles although high muzzle pressure barrel assemblies may be utilised if  
desired. Respective barrel assemblies in the pod may be loaded with different  
20       projectiles and the pod may, include barrel assemblies having different size bores.

Suitably each projectile includes a trailing collar assembly captively mounted  
to the projectile body and when stored in the barrel, extend rearwardly to wedge  
against the nose portion of a trailing projectile body. Suitably the wedging action is  
provided by a shallow wedge whereby, in use, the trailing end of the collar is  
25       expanded into operative sealing engagement with the barrel.

The trailing collar may be mounted for limited axial movement relative to the  
projectile body and the leading end of the collar formed with an annular sealing face  
engageable with a complementary face formed on the projectile body whereby  
rearward movement of the projectile body resulting from the reaction of propellant  
30       gases thereon forces the its complementary face into sealing engagement with the  
annular sealing face at the leading end of the collar.

The complementary face and the annular sealing face could extend  
substantially radially and could be formed with complementary sealing features

thereon. Preferably however these faces are complementary part-conical sealing faces which wedge into tight sealing engagement with one another. The leading end part may also be expandable into operative sealing engagement with the barrel.

5 Suitably however the wedging between the part-conical faces are relatively steep faces whereby the leading end of the collar is not expanded into operative sealing engagement with the barrel by the wedging action.

Preferably, each projectile is associated with a high pressure propellant chamber which exhausts to respective low pressure propulsion chambers formed between the adjacent projectiles for efficient low muzzle velocity operation. The high  
10 pressure propellant chambers could be formed integrally with the projectile body or the trailing collar or they could be provided at the exterior of the barrel to communicate therewith through ports provided through the barrel wall.

The projectiles may be electronically fired at an infinitely variable frequency up to the maximum rate of fire. For firing from a barrel assembly according to an aspect  
15 of this invention and arranged for low pressure, low muzzle velocity, the rate of firing is limited by the time taken for each projectile to leave the barrel and by the time necessary for the gas pressure in the barrel to drop sufficiently to warrant the firing of the next projectile.

In another aspect his invention resides broadly in a weapon having a plurality  
20 of barrel assemblies of the type described arranged in a transportable pod having:-

a pod housing;

support means for stably supporting the pod housing;

a plurality of barrel assemblies of the type described supported in spaced  
relationship within said pod housing by respective swivel mounts, and

25 direction control means for selectively varying the relative alignment between the barrel assemblies so as to selectively vary the relative delivered positions of projectiles fired from different barrels at the target

The direction control means may permit uniform pivoting of the barrel assemblies so that the inclination of the axes of the barrel assemblies relative to a  
30 pod axis may be selectively varied to enable a target position relative to the pod to be varied. The direction control means may permit individual pivoting of each barrel assembly so that the inclination of each barrel axis relative to a pod axis may be individually varied to enable a target position or individual target positions relative to

the pod to be varied. Such individual control may be associated with individual firing control of each barrel assembly if desired.

Then again the direction control means may permit a controlled splaying of all barrel assemblies so that the area covered at the target zone may be selectively varied. Alternatively the direction control means may permit all or some of the above variations to be achieved individually or collectively as required.

The pod housing may be of any suitably configuration and may taper towards its base to enable barrel assemblies to be supported in a splayed attitude. The support means may be fold out legs which may be adjustable if desired. In one form the pod has a rectangular pod housing for economy or ease of storage and/or transport and the base thereof constitutes the support means.

The barrel assembly variants disclosed herein may also constitute further aspects of this invention .

A pod of barrel assemblies according to aspects of this invention may be fired from a marine platform into water, or from a sled towed underwater. The pod may also be fired from an aircraft, or from a number of aircraft flying in formation and if desired, with the firing coordinated between the aircraft by a suitable electronic link.

#### DESCRIPTION OF PREFERRED EMBODIMENTS

In order that this invention may be more readily understood and put into practical effect, reference will now be made to the accompanying drawings which illustrate typical embodiments of the invention, wherein:-

FIGS. 1 to 4 diagrammatically illustrate typical barrel assemblies according to this invention;

FIG. 5 illustrates a pod of grenade firing barrel assemblies;

FIG. 6 is a diagrammatic cutaway end view of a cluster of barrels;

FIG. 7 illustrates a typical application of the present invention;

Fig. 8 illustrates a further application of the invention utilising an unmanned aerial vehicle;

FIG. 9 is an underside view of one of the pod carriers of the aerial vehicle of Fig. 8;

FIG. 10 is a diagrammatic cross-sectional view of a pod of splayable barrel assemblies, and

FIG. 11 illustrates a typical application of one aspect of this invention.

The barrel assembly 10 illustrated in Fig. 1 has multiple grenade carrying projectiles 11 of substantially known form loaded in a rifled barrel 12 to impart spin upon firing for activating the arming device.

5 However the rupturable propellant cup or high pressure chamber 13 is fixed to the projectile 11 for dispensing from the barrel with the projectile to clear the barrel for the following firing. This chamber exhausts through exhausts 14 into the barrel space between the stacked projectiles 11 which forms the low pressure chamber 15.

10 Each projectile 11 includes a projectile body 17, which in this embodiment is a grenade housing 18 housing a grenade 22, and a trailing sleeve 19 which is retained thereon for limited relative axial movement. The sleeve 19 has a head part 20 which tapers inwardly to an internal collar 21 which extends into a complementary shaped external recess 23 formed in the grenade housing 18. The sleeve 19 tapers outwardly at its rear end 24 to engage over a corresponding tapered leading face 25  
15 of the projectile 11 stacked therebehind.

In use, as disclosed in our earlier inventions, loading of the projectiles 11 into the barrel 12 forms a wedge type seal 26 between the leading end of the sleeve 19 and the trailing tapered face 27 of the head part 20 which prevents the ignition of the leading propellant spreading about the grenade housing to the propellant in the  
20 following round.

Loading also effects a further wedge type seal 28 between the rear end 24 and the leading face 25 and expands the rear end 24 into operative sealing engagement with the barrel 12. Thus the sleeve forms a barrier to spreading of ignition thereabout to propellant charge in the trailing round.

25 Firing of the leading projectile 11 releases the leading seal while maintaining the sleeve 19 captive with the grenade housing 18 but maintains an operative seal at the rear end of the sleeve with the barrel 12. As the pressure propelling the projectile is relative low, in the order of 3000psi, only minimal sealing is required.

30 The barrel assembly 30 illustrated in Fig. 2 is similar in configuration to that illustrated in Fig. 1, the main difference being the manner in which the sleeve 31 is retained on the grenade housing 32 and the configuration in which the sleeve 31 confines a smaller low pressure chamber 33 between adjacent projectiles 35 into which the high pressure chamber 36 exhausts through ports 38.

The sleeve 31 also has a shallow wedge 34 at its leading end which may be expanded into sealing engagement with the barrel during loading but which is released upon firing during the initial forward movement of the housing 32 and upon subsequent impact with the back face of the return 27.

5       The barrel assembly 40 illustrated in Fig. 3 is also similar in configuration to that illustrated in Fig. 1, the main difference being the wedge sealing angles  $\alpha$  and  $\beta$  between the trailing sleeve 31' and the grenade housing 42. In this embodiment which is more suited to low pressure low muzzle velocity applications, the opposed ends of the trailing sleeve 31' formed by the sealing angles  $\alpha$  and  $\beta$  of between 30° and 55° are sufficiently blunt as to resist outward splaying into sealing engagement with the barrel under the influence of propellant pressures. Typically these would be in the order of 3000psi to 5,000psi with muzzle velocities of about 70m/sec and 250m/sec respectively.

15       It will be seen that the bulbous nose part 43 of the projectile body 42 is hollow for carrying explosives, or fuel as referred to in relation to Fig. 11. As in the embodiments illustrated in Fig 1 and 2 the propellant 37 in the high pressure chamber 46 is selectively ignited to expel high pressure gases through the trailing ports 39 into the low pressure chamber 33' by a detonator 16 triggered through an electrical circuit which uses the projectile column as one part of the circuit, the barrel 20 41 being made of insulating material or so lined and with the circuit completed by an imbedded insulated wire 29 leading from the primer 16 to a contact 29' on the projectile surface which is aligned when loaded, with a complementary contact 44 supported in the barrel 41.

25       Alignment of the contacts can be achieved in a barrel and projectile located by rifling grooves during the loading process. In a non rifled design, the use of a annular contact in the barrel wall can achieve a similar result.

30       The barrel assembly 45 illustrated in Fig. 4 substantially corresponds in mechanical configuration to the Fig. 3 embodiment. However the high pressure chamber 46 is disposed externally of the barrel and communicates with the low pressure chamber 47 through aligned ports 48 and 49 in the wall of the barrel 50 and trailing sleeve 51 respectively. As shown cutaway in Fig. 6 the high pressure chamber 46 is of such configuration that it will fit snugly into the space bounded by the adjacent side walls 52 and 53 of further barrels of a cluster of barrels 45.



Further in each of the above embodiments the sleeve provided a relatively broad cylindrical surface which engages closely with the bore of the barrel so as to assist in preventing passage of ignited gases between the sleeve and the barrel.

Further in the embodiments illustrated in Figs. 2, 3 and 4 the inward projections on the sleeve engage within complementary recesses formed in the housing and provide a labyrinth type seal across the inner face of the sleeve.

In all the above embodiments the propellant in the high pressure chamber is adapted to be ignited by electronically controlled ignition means as known from our earlier International Patent Applications.

As illustrated in Fig. 5, a typical weapon according to this invention includes a cluster of barrel assemblies 55 adapted to fire grenades 56 and contained in a pod 57 such that a selected number of near simultaneously exploding grenades may be fired at a time. The grenades 56 are fired selectively from the pod 57 by computer control. The weapon in the illustrated embodiment contains ninety-eight barrel assemblies each containing stacked grenades 56 and having selectively ignitable internal or external propellant charges. In this embodiment the pod 57 is carried on a turret mounting 58 whereby the barrels may be swivelled about vertical and horizontal axes for aiming purposes.

Suitably 40mm grenades 56 are used as the projectiles because of their ready availability. The grenades 56 are fired selectively by computer control from the pod 57 which is envisaged will contain ninety-eight barrel assemblies each containing stacked grenades 56 and having selectively ignitable internal or external propellant charges. The grenades 56 may be selectively fired to form a controlled impact array of exploding grenades on the zone to be investigated.

By way of example, using such a barrel assembly in a pod of ninety-eight 40mm barrels that would measure approximately 350mm x 700mm in cross section, with each barrel loaded with six projectiles, and with each projectile similar in size to a conventional 40mm military grenade, a barrel length of 900mm would be required and the assembly would provide a projectile capacity of five hundred and eighty-eight projectiles. This configuration would be suitable for seismic applications requiring a short range such as for delivering projectiles from downwardly facing barrels. For longer range delivery fewer projectiles would be accommodated in each of such

barrels or longer barrels would be used and more propellant would be utilised to achieve higher muzzle exit velocities.

The maximum rate of fire per barrel is expected to be as high as 20,000 projectiles per minute and the maximum rate for the combined ninety-eight barrels would be 1,960,000 projectiles per minute, assuming that all barrels are fired simultaneously at the maximum rate.

For a ninety-eight shot burst firing the leading round from each of the ninety-eight barrels, the rate is infinitely variable and which may be a ninety-eight shot burst fired at a rapid frequency.

The above ninety-eight barrel pod is one example of a range of performance specifications that could be available. Different performance specifications can be generated by altering the component parts of the pod. For example, a pod may be preloaded such that the nature and weight of the explosive and/or projectile may vary between individual barrels in the pod, or within a barrel.

A plurality of such pods may be carried on a vehicle and arranged whereby each pod may be selectively directed toward a desired target and fired at a selected rate. Alternatively the pods may be fired collectively at a single target.

In the embodiment illustrated in Fig. 7, the grenades are fired downwardly from a pair of such pods, only one of which is shown, carried by a helicopter to provide bombing coverage of a tract of land. The density of such bombing and the area of land covered by the bombing can be controlled by controlling the variables such as rate of fire, elevation and speed of the aircraft.

The unmanned combat aerial vehicle illustrated in Figs 8 and 9 carries six such pods in cases under the wings at each side of the fuselage. It is envisaged that each pod could contain six 40mm grenade pods with one hundred barrel assemblies per pod and with six grenades in each barrel. This would provide a loaded capacity of 7,200 grenades representing a payload of about 3,600lb.

In this embodiment aiming of the barrels containing the grenades would be achieved by remote control of the aircraft which may carry a video camera or the like for assisting its control remote from an operator.

The projectile firing pod is illustrated diagrammatically in Fig. 10 and cutaway to illustrate only two barrel assemblies of the type described which would

be contained within a rectangular pod housing 72 in spaced apart relationship suspended from an upper wall 73 from respective ball type mountings 74.

Each barrel assembly 71 extends downwardly through the fixed ball-like mountings 74 to direction control means 75 which in this embodiment is able to  
5 individually or collectively control the barrel assemblies 71 for movement to an inclined attitude at one side or the other of their normal vertical position illustrated or to the front or back of that normal vertical position or to a combination of those attitudes as required.

For this purpose, each barrel assembly is provided with a cylindrical  
10 positioning block 78 supported rotatably about its lower end for eccentric motion about the axis of each barrel assembly. An intermediate wall 80 is apertured to closely receive each cylindrical positioning block 78. The vertical position of the intermediate wall 80 is controlled by a hydraulic ram 81 supported on the base wall 82 of the pod housing 72.

15 Extension and/or retraction of the ram 81 will move the intermediate wall 80 in a vertical direction restraining the respective apertures for movement along respective fixed axes so that, in the illustrated barrel assemblies, as the intermediate wall 80 moves downwardly, the lower ends of the barrel assemblies 71 will be moved inwards towards one another causing the barrel assemblies to splay outwardly  
20 relative to one another due to the fixed spacing of their upper ball mountings 74.

Accordingly, it will be seen that by controlling the position of the hydraulic ram 81 the barrel assemblies can be positioned with their axes vertical and parallel, inclined to the vertical and parallel, or with their axes in a splayed attitude.

Each positioning block may be selectively rotated about the lower end of the  
25 barrel assembly on which it is mounted by extension or retraction of a further hydraulic ram 84 supported on the intermediate wall 80 and extending to a track 83 in the outer side wall of the respective positioning block 78. The configuration of the track could be such that normal vertical movement of the intermediate wall 80 will not cause rotation of the blocks 78 in the direction of the arrow 85 unless the ram 84 is  
30 extended or retracted.

It will be seen that the vertical ram 81 connected to the intermediate wall 80 acts collectively on all barrel assemblies so as to move them in unison while individual horizontal rams 84 are provided for each barrel assembly 71.

These rams 84 may be individually controlled independent of the ram 81. Thus, for example, whereas the positioning blocks 78 are illustrated in the drawings arranged at opposing offsets with respect to the illustrated barrel assemblies 71, one of the positioning blocks could be rotated through  $780^\circ$  by its ram 84 so as to arrange both cylindrical positioning blocks 78 with their axes parallel to one another and at an identical offset to the axes of the associated barrel assemblies 71.

In this configuration, operation of the vertical ram 81 would pivot both barrel assemblies identically to one side or the other from the vertical, while at intermediate positions of one positioning block 78 relative to the other, splaying of the barrel assemblies could be achieved. Of course, both sets of rams 84 and 81 could be actuated simultaneously and be controlled by a suitable controller 86 to achieve a significant variation in target direction and spread of the fall of projectiles fired therefrom. In addition, the configuration of the impact pattern may be varied within a set zone. The barrel assemblies may also be controlled to provide a limited amount of turreting to achieve long range tight grouping of projectiles.

It will be seen that a projectile firing pod which may have an in-built remote controller 86, which may receiving information from orientation sensors mounted on or associated with the barrel assemblies or from the ram positions, may be readily delivered and deployed very quickly to a site even though that site may be off-level and thereafter remotely controlled to fire projectiles at a common or at varying inclinations to the vertical to achieve the desired fall of projectiles at the impact zone. Also, the proportions of the impact pattern may be varied or maintained constant with varying target spread areas.

The drives for rotating the blocks 78 could be independent of the intermediate wall 80, such as rotary drives with flexible or splined drives to the base of the barrel assemblies. Further the base 82 could be inclined to the side walls or be jackable to an inclined position to provide a coarse inclination toward the target zone with final aiming control achieved remotely by the direction control means 75.

A typical application of pods described above, as illustrated in Fig. 11 could be to fire a selected array of projectiles containing fuel to be dispersal therefrom in a controlled manner and pattern to form a defined fuel/air cloud to be detonated by further projectiles fired from the same pod or pods.

For example the fuel containing projectiles could form a fuel/air cloud 90 in a substantially conical shape and detonation could be effected simultaneously from a plurality of locations 91 about the upper portion of the cone to form a focused explosion directed to the desired target 92.

- 5           The size and height of the cloud could 90 be selected to deliver high pressure shock waves to a localised area. This could be utilised to explode a land mine field, as a lethal anti-personnel attack or, by further elevating the cloud 90 to provide a concussive non-lethal attack against ground troops.

- 10           It will of course be realised that the above has been given only by way of illustrative examples of the invention and that all such modifications and variations thereto as would be apparent to persons skilled in the art are deemed to fall within the broad scope and ambit of the invention as is defined by the appended claims.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. A weapon having a plurality of barrel assemblies of the type described arranged in a transportable pod whereby the barrels may be transported to and  
5 directed at a selected target.
2. A weapon as claimed in claim 1 and including projectiles each having a projectile body in which matter or objects or may be transported.
- 10 3. A weapon as claimed in claim 1 or claim 2, wherein each projectile includes a trailing collar assembly captively mounted to the holding portion and extending rearwardly to wedge against a complementary shaped nose portion of the projectile body.
- 15 4. A weapon as claimed in claim 3, wherein the wedging configuration formed in the trailing end of the collar is a shallow wedge.
5. A weapon as claimed in claim 3 or claim 4, wherein the collar is mounted for limited axial movement relative to the projectile body and the leading end of the collar  
20 is formed with an annular sealing face engageable with a trailing sealing face formed on the projectile body.
6. A weapon as claimed in claim 5, wherein said trailing sealing face and the annular sealing face are complementary part-conical sealing faces.  
25
7. A weapon as claimed in any one of the preceding claims, wherein each projectile is associated with a high pressure propellant chamber exhausted to respective low pressure propulsion chambers formed between the adjacent  
30 projectiles.
8. A barrel assembly for a weapon substantially as hereinbefore described and or illustrated.

9. A weapon including a plurality of barrel assemblies of the type described arranged in a transportable pod having:-

a pod housing;

support means for stably supporting the pod housing;

5 a plurality of barrel assemblies of the type described supported in spaced relationship within said pod housing by respective swivel mounts, and

direction control means for selectively varying the relative alignment between the barrel assemblies so as to selectively vary the relative delivered positions of projectiles fired from different barrels at the target.

10

10. A weapon as claimed in claim 9, wherein the direction control means permits uniform pivoting of the barrel assemblies so that the inclination of the axes of the barrel assemblies relative to a pod axis may be selectively varied individual pivoting of each barrel assembly so that the inclination of each barrel axis relative to a pod  
15 axis may be individually varied to enable a target position or individual target positions relative to the pod to be varied.

11. A weapon as claimed in claim 9 or claim 10, wherein the direction control means permits a controlled splaying of all barrel assemblies.

20

1 / 7

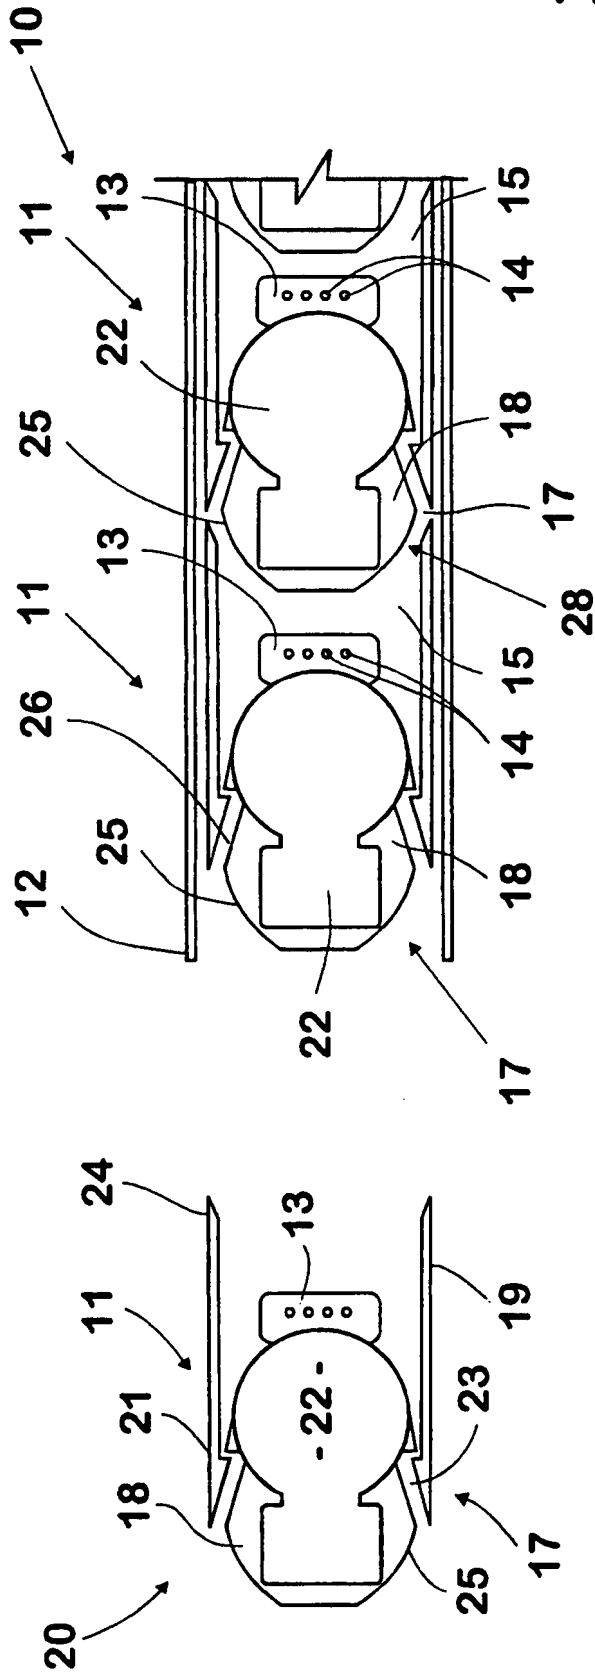


Fig. 1




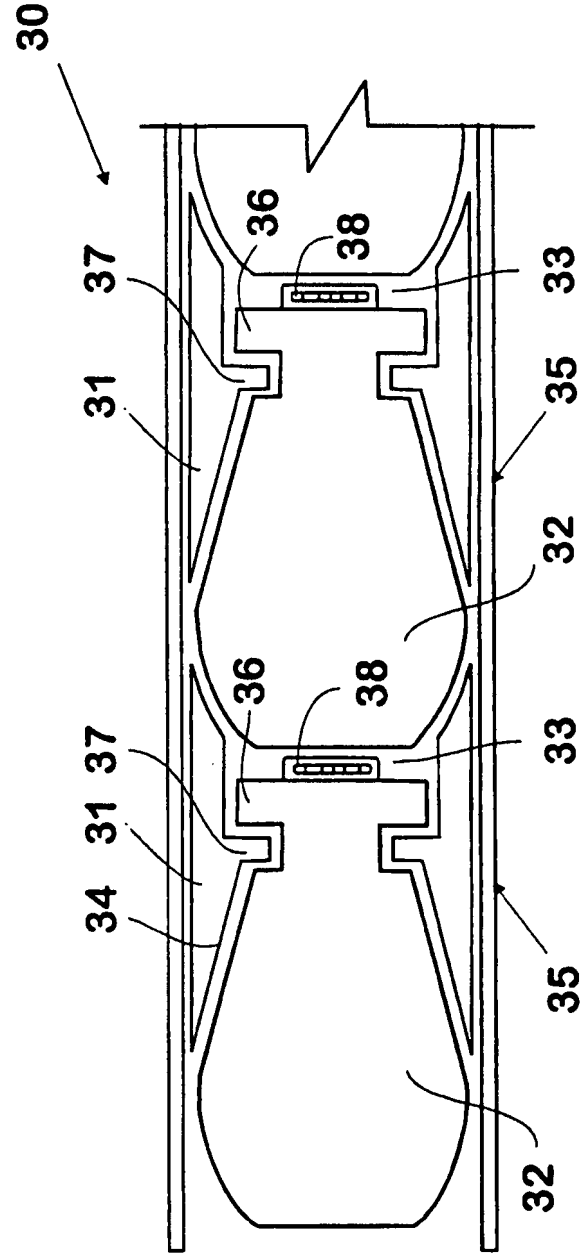


Fig. 2

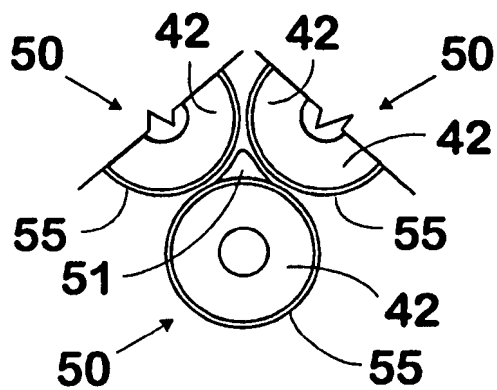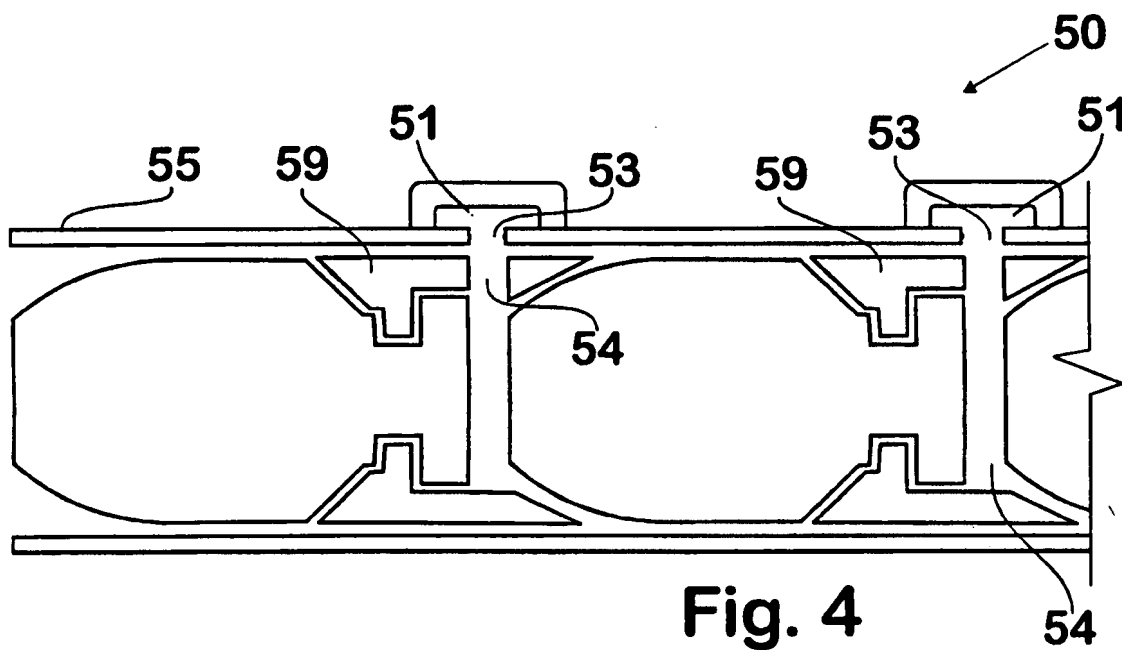

2 / 7

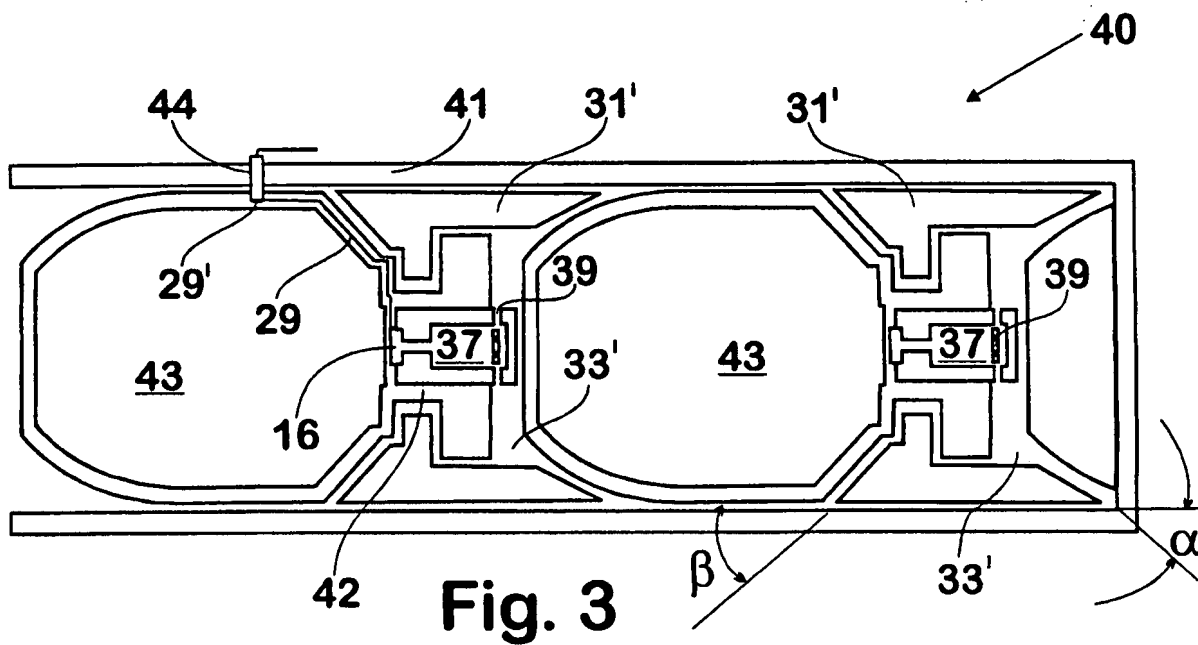

3 / 7

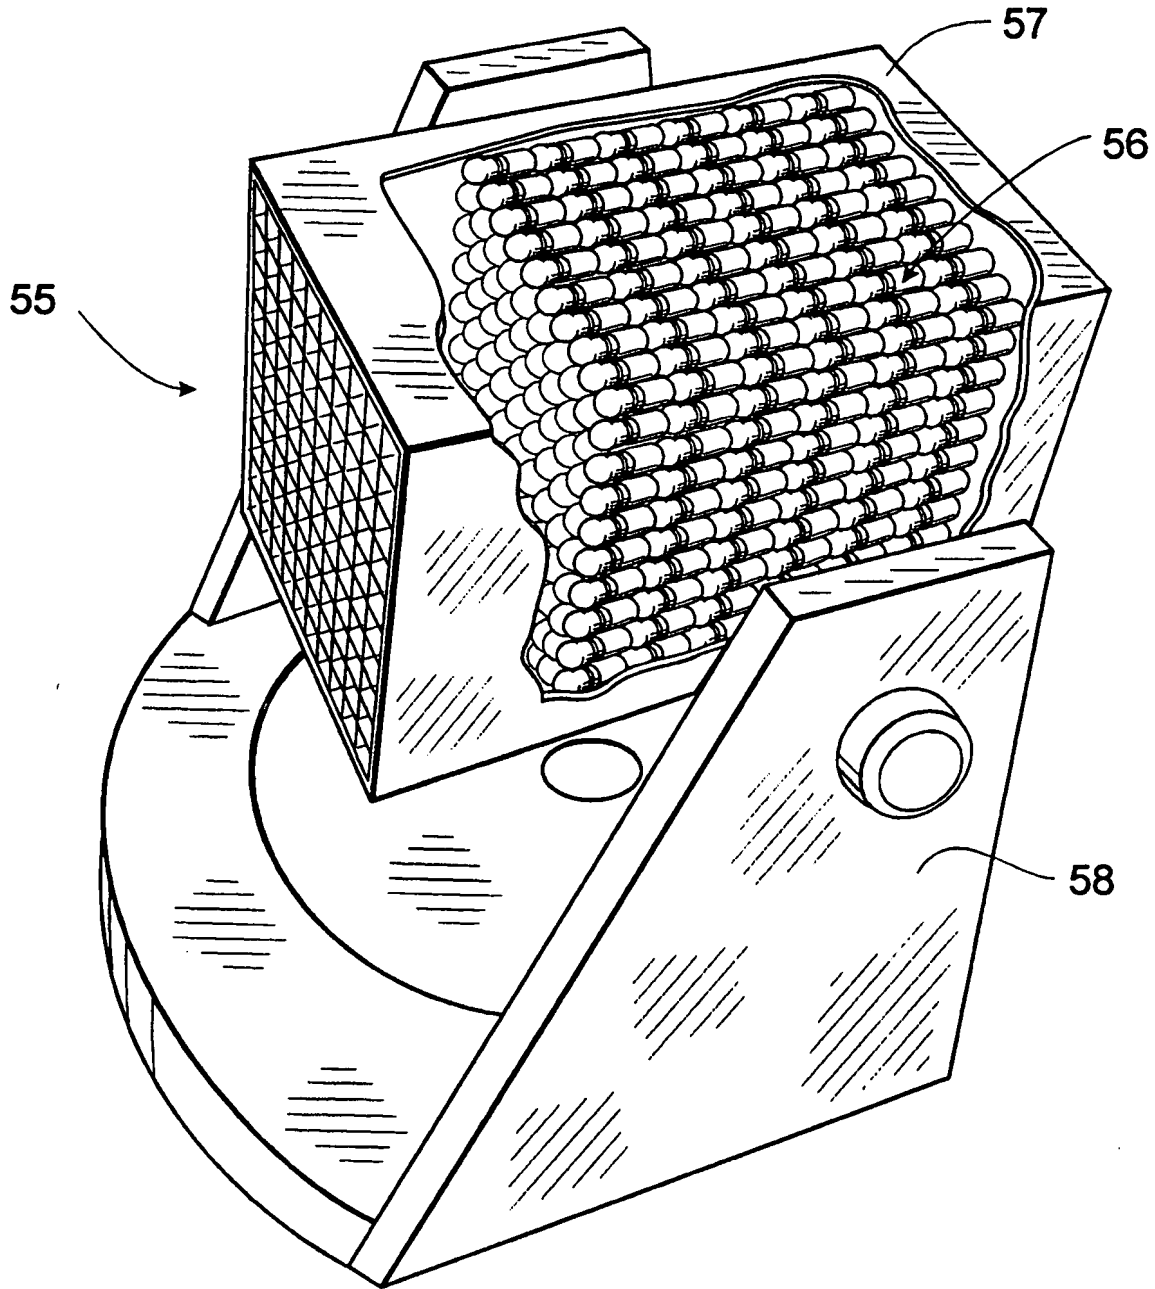


Fig. 6

4 / 7

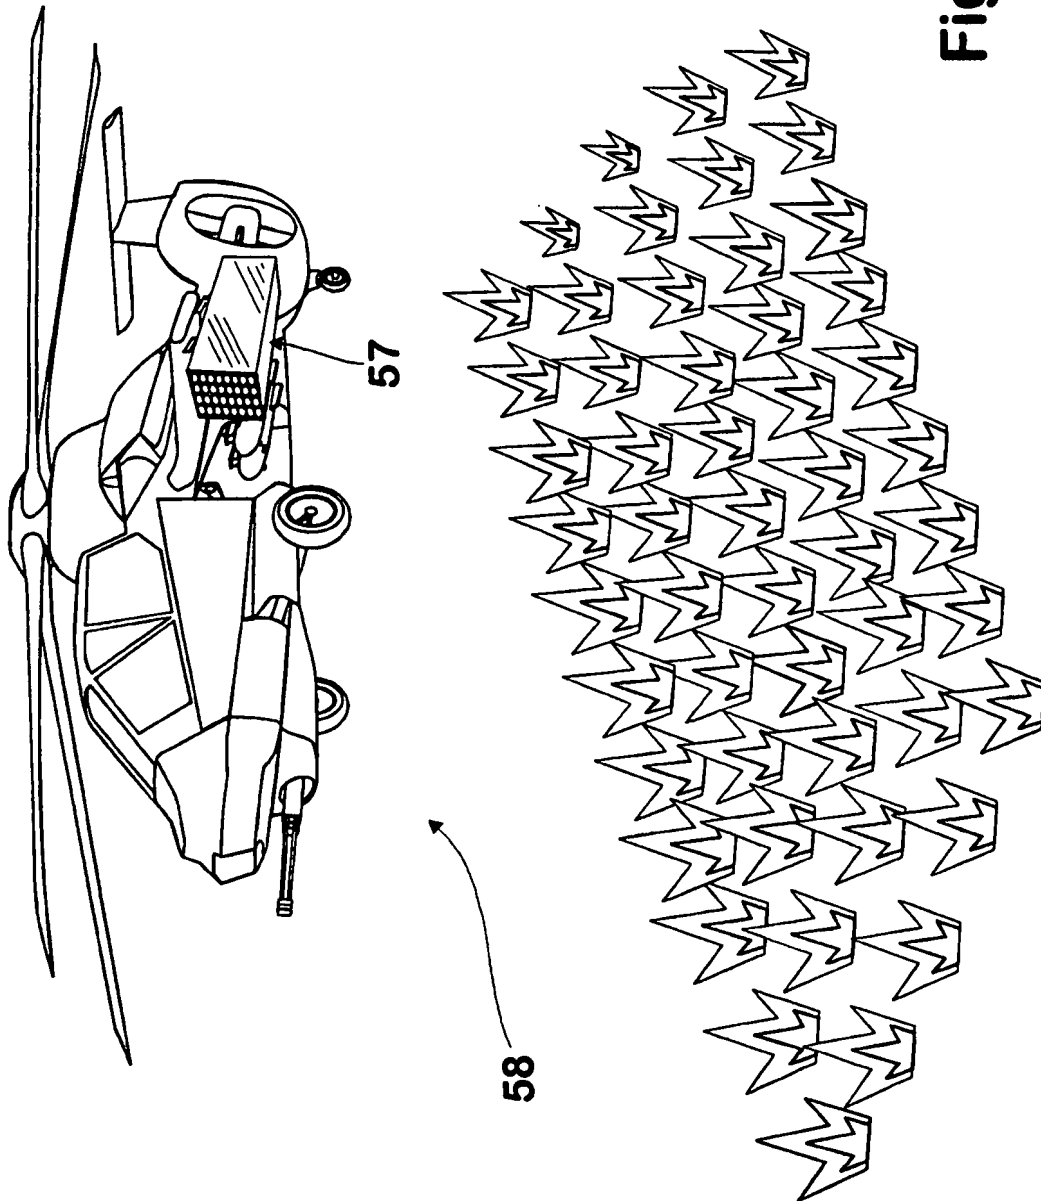
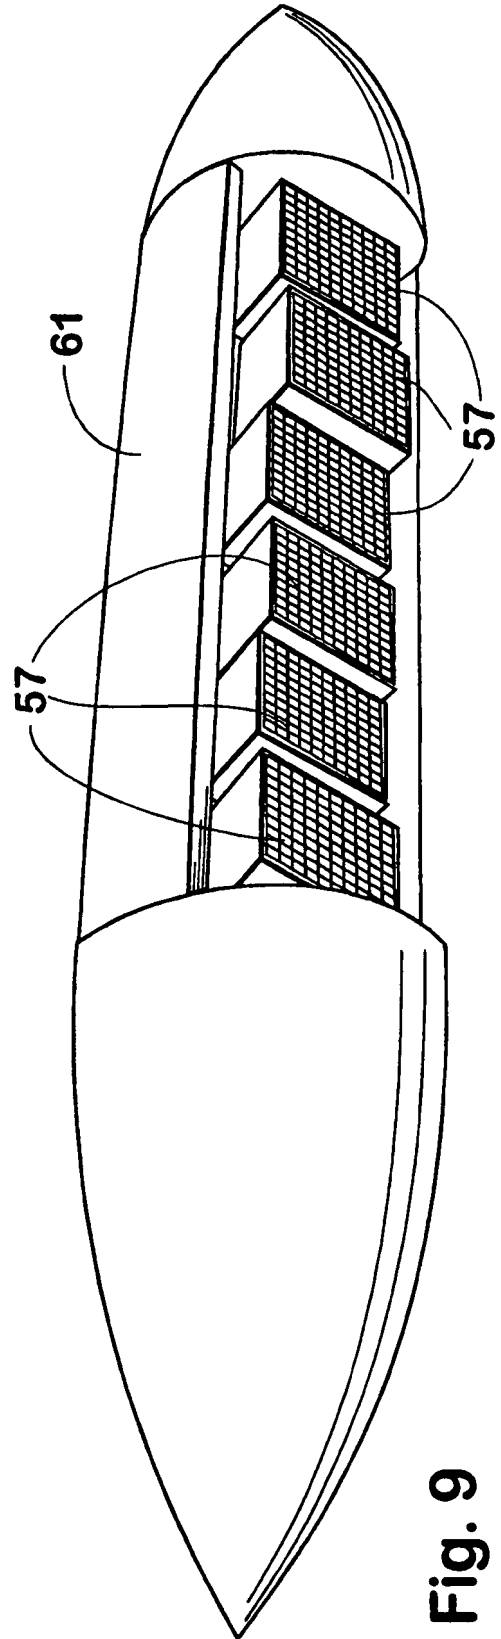
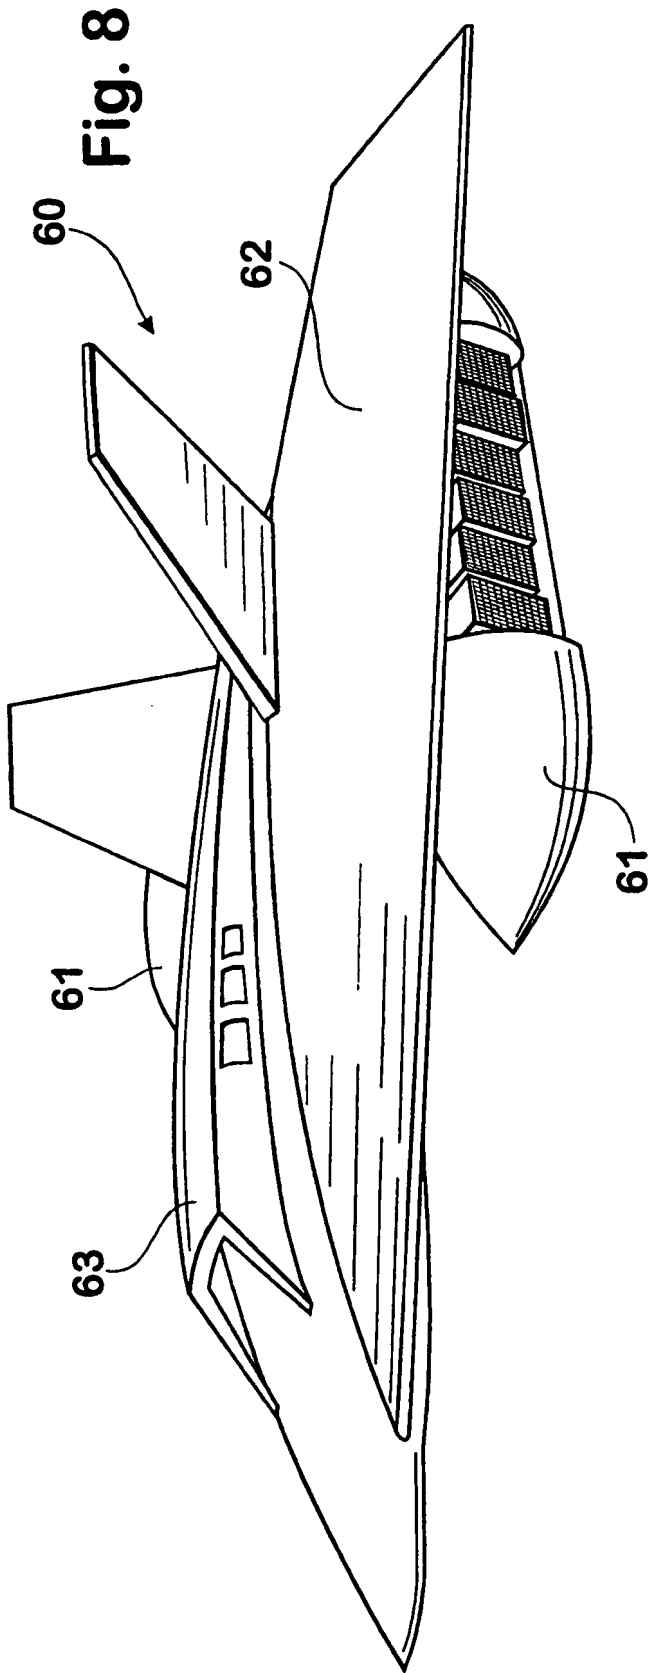


Fig. 7

5 / 7



**Fig. 9**

6 / 7

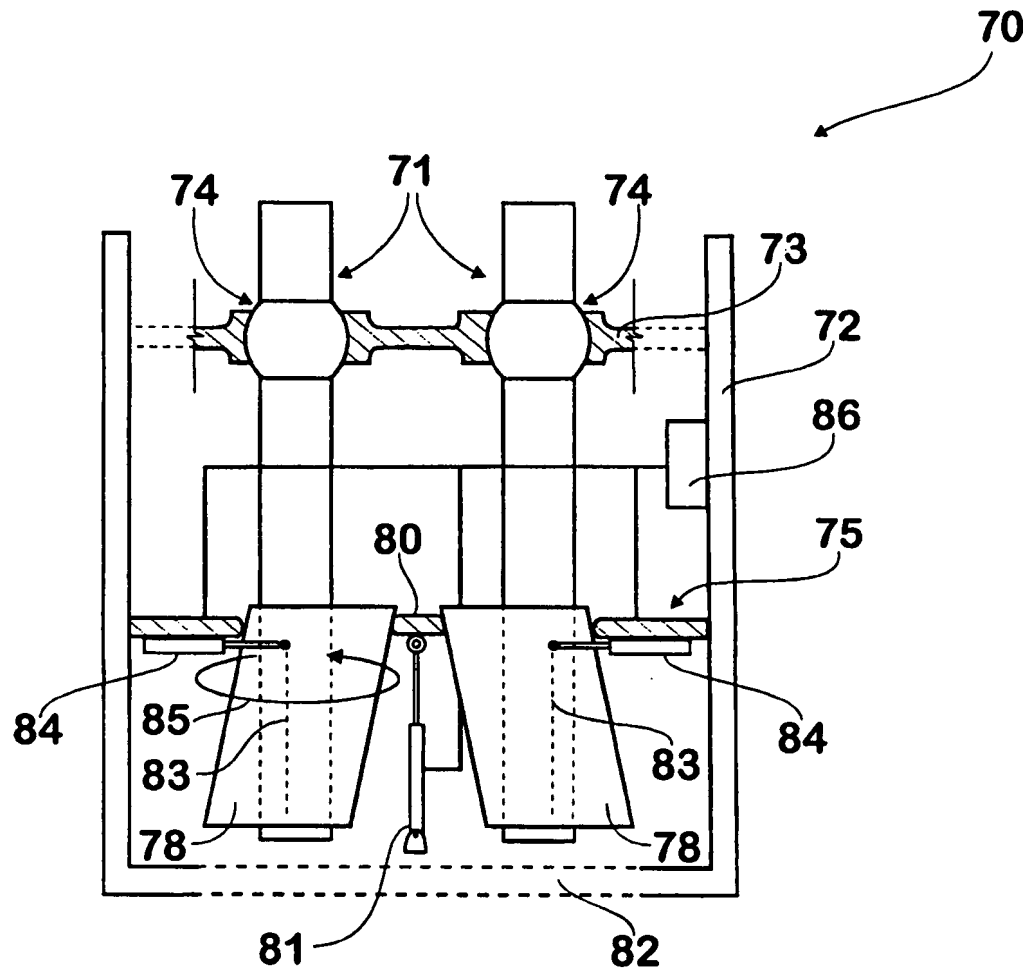


Fig. 10

717

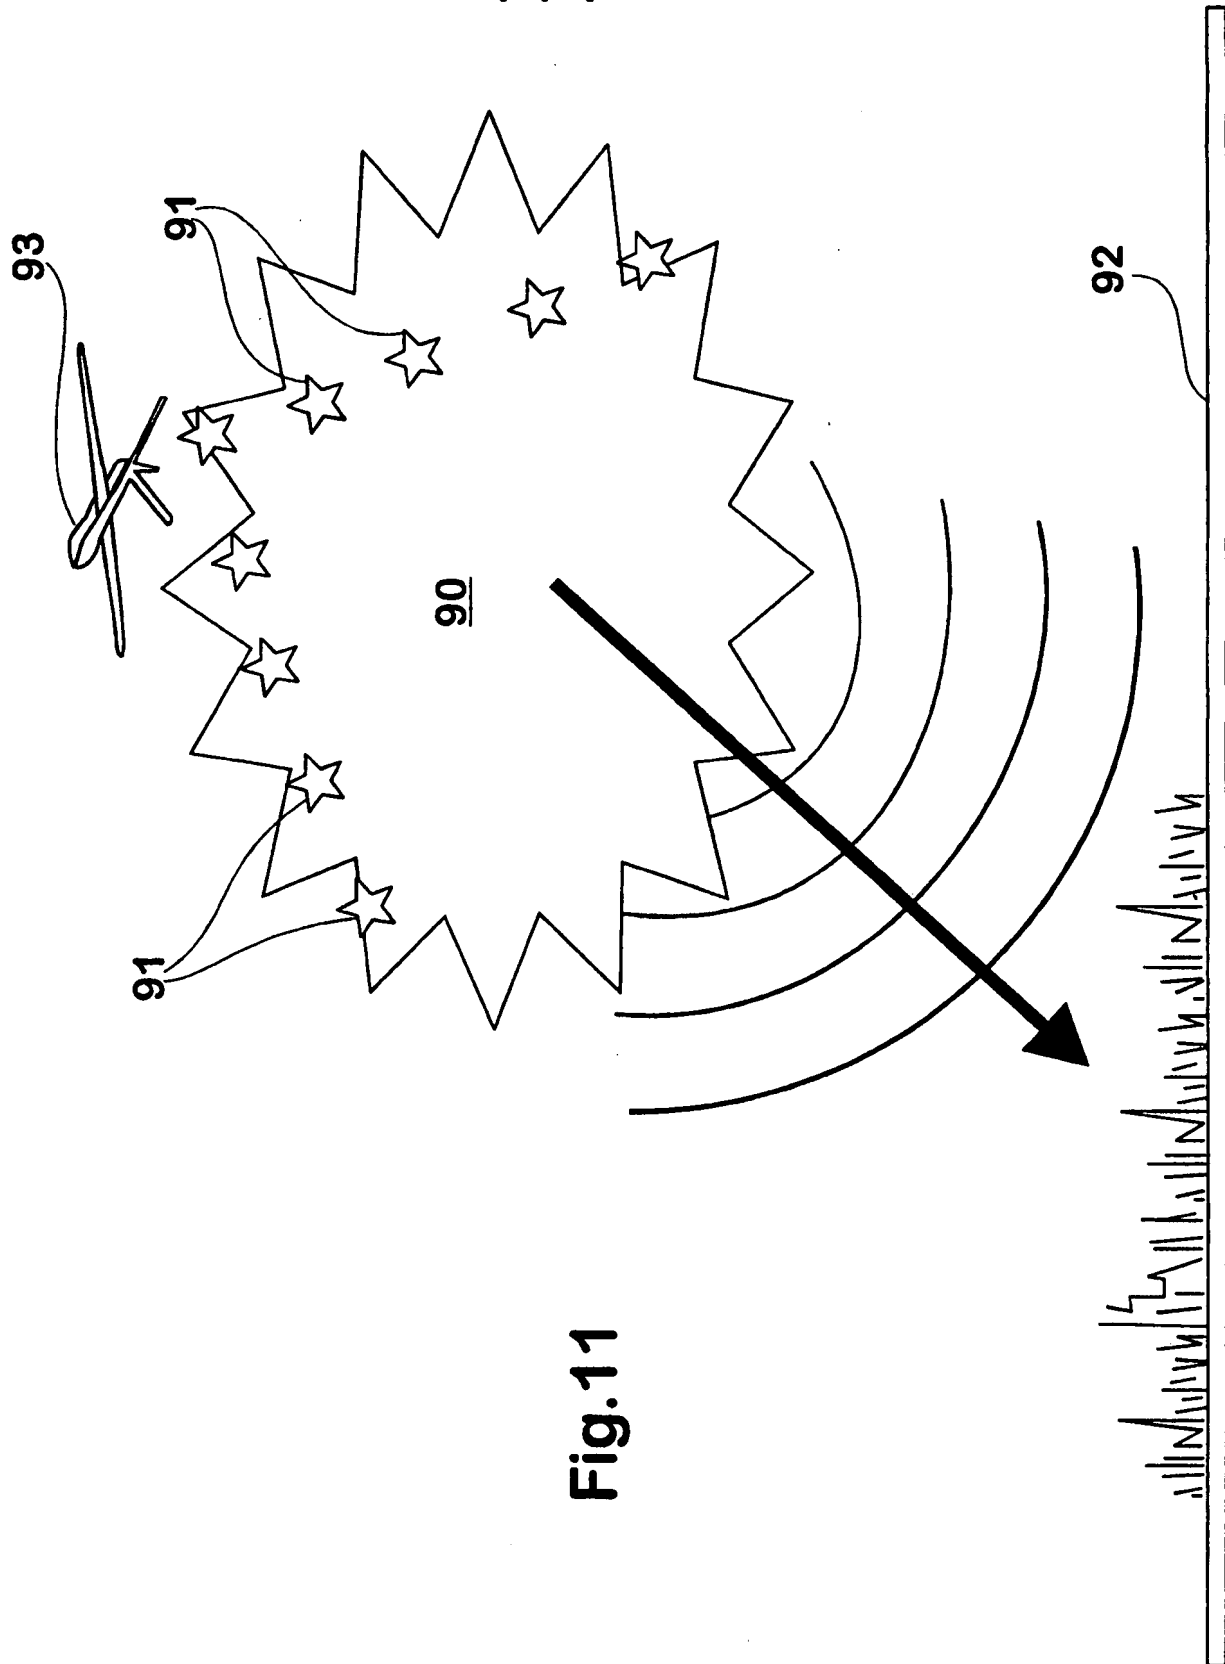


Fig.11

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/AU00/00297

**A. CLASSIFICATION OF SUBJECT MATTER**

Int. Cl. <sup>7</sup>: F41A 21/06, 21/48, 19/65; F41G 3/04; F42B 14/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC: F41A 19/65, 21/06, 21/48; F41F; F41G 3/04; F42B 14/00; F42C 15/00, 15/02, 15/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

AU: IPC as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
DWPI with keywords

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|--|-----------------------|
| X         | AU 62790/94 A (O'DWYER) 26 September 1994  | 1-8                   |
| Y         | Whole document   | 9-11                  |
|           | DE 3643197 A (MESSERSCHMITT-BÖLKOW-BLOHM GmbH)                                     |                       |
|           | 23 June 1988   |                       |
| Y         | Whole document   | 9-11                  |
|           | GB 1594686 A (RHEINMETALL GESELLSCHAFT MIT BESCHRÄNKTER HAFTUNG) 5 August 1981     |                       |
| Y         | Figures 2-3  | 1-8                   |

☒ Further documents are listed in the continuation of Box C ☒ See patent family annex

|   |  |
|---|--|
| * Special categories of cited documents:  |  |
| "A" document defining the general state of the art which is not considered to be of particular relevance  | "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  |
| "E" earlier application or patent but published on or after the international filing date   | "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone   |
| "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) | "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art |
| "O" document referring to an oral disclosure, use, exhibition or other means  | "&" document member of the same patent family  |
| "P" document published prior to the international filing date but later than the priority date claimed  |  |

Date of the actual completion of the international search  
12 July 2000

Date of mailing of the international search report  
19 JUL 2000

Name and mailing address of the ISA/AU  
AUSTRALIAN PATENT OFFICE  
PO BOX 200, WODEN ACT 2606, AUSTRALIA  
E-mail address: pct@ipaaustralia.gov.au  
Facsimile No. (02) 6285 3929

Authorized officer  
JEFFREY CARL  
Telephone No : (02) 6283 2543

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU00/00297

| C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT |  |                       |
|---|--|-----------------------|
| Category*   | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
| Y   | DE 4014192 A (MESSERSCHMITT-BÖLKOW-BLOHM GmbH) 7 November 1991<br>Whole document   | 1-8                   |
| A   | AU 38985/72 (465643) B (THOMSON-CSF) 16 August 1973                                |                       |



## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU00/00297

**Box I Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos :  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos :  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos :  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a)

**Box II Observations where unity of invention is lacking (Continuation of item 3 of first sheet)**

This International Searching Authority found multiple inventions in this international application, as follows:

1. Claims 1-8 directed to a weapon having a plurality of barrel assemblies in a transportable pod; and
  2. Claims 9-11 directed to a weapon having a plurality of barrel assemblies in a transportable pod wherein the barrel assemblies can be selectively aligned with respect to each other;
- as reasoned on the extra sheet.
1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims
  2. ☒ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
  3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
  4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

**Remark on Protest**

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.  
PCT/AU00/00297

**Supplemental Box**

(To be used when the space in any of Boxes I to VIII is not sufficient)

**Continuation of Box No: II**

The international application does not comply with the requirements of unity of invention because it does not relate to one invention or to a group of inventions so linked as to form a single general inventive concept. In coming to this conclusion the International Searching Authority has found that there are different inventions as follows:

1. Claims 1-8 directed to a weapon having a plurality of barrel assemblies in a transportable pod whereby the barrels can be transported to and directed at a selected target. It is considered that the feature of a plurality of barrel assemblies in a transportable, directable pod comprises a first "special technical feature".
2. Claims 9-11 directed to a weapon having a plurality of barrel assemblies in a transportable pod wherein the barrel assemblies can be selectively aligned with respect to each other so as to selectively vary the relative delivered positions of projectiles fired from different barrels at the target. It is considered that the feature of the barrels being selectively aligned with respect to each other comprises a second "special technical feature".

These groups are not so linked as to form a single general inventive concept, that is, they do not have any common inventive features, which define a contribution over the prior art. The common concept linking together these groups of claims is a weapon having a plurality of barrel assemblies in a transportable, directable pod. However this concept is not novel in the light of patent document AU 62790/94 by O'DWYER (see figure 2 for example).

Consequently the common concept or feature does not constitute "a special technical feature" within the meaning of PCT Rule 13.2, second sentence, since it makes no contribution over the prior art. Since there exists no other common feature that can be considered as a special technical feature within the meaning of PCT Rule 13.2, second sentence, no technical relationship within the meaning of PCT Rule 13 between the different inventions can be seen. Therefore, a posteriori, the claims do not satisfy the requirement of unity of invention.

International application No.  
**PCT/AU00/00297**

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

| Patent Document Cited in Search Report |          |    |          | Patent Family Member |          |    |          |
|--|----------|----|----------|----------------------|----------|----|----------|
| AU                                     | 62790/94 | BR | 9406382  | CA                   | 2157882  | CN | 1120863  |
|  |          | EP | 693172   | HU                   | 72876    | SG | 49815    |
|  |          | US | 5883329  | WO                   | 94/20809 | AU | 23651/97 |
|  |          | AU | 48863/99 |                      |          |    |          |
| GB                                     | 1594686  | DE | 2723621  |                      |          |    |          |
| AU                                     | 38985/72 | BE | 779380   | CA                   | 941347   | CH | 569949   |
|  |          | ES | 399852   | FR                   | 2125701  | GB | 1376018  |
|  |          | IT | 947544   | NL                   | 7201933  | US | 3974740  |
|  |          | ZA | 7200674  |                      |          |    |          |